

Powered by




Intelligence
Inside

G LORY SERIES

EFFICIENT, ELEGANT AND COMFORTABLE.

LIGHT CAN IMPROVE WORK EFFICIENCY AND WORK
ATTITUDE.

GLORY

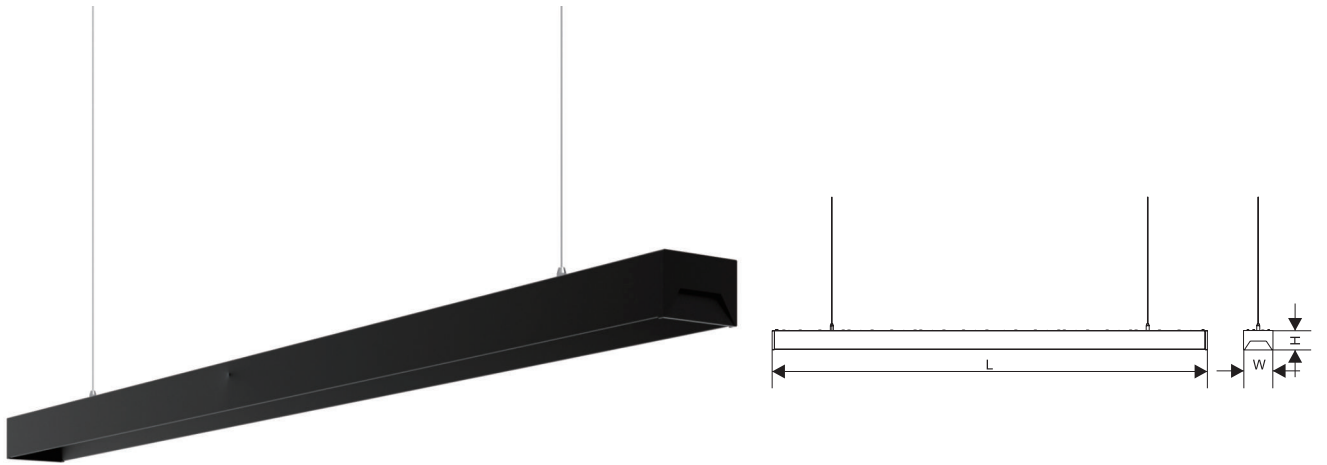

Parameters



Model	Power	LED Qty	Luminous Flux	Efficacy	Size
DL7850	28W	2835SMD*150LEDS	2940LM	105lm/W	1155*78*50mm

Input Voltage: AC180-240V
 Frequency: 50/60Hz
 Power Factors: ≥ 0.9
 CCT: 4000 ~ 6500K
 CRI: Ra ≥ 80
 Beam Angle: 120°
 Main Material: Aluminum+PS
 Body Color: Sand Black
 Input Cable: 0.5mm²
 Installation: Suspended
 Protection: IP20
 Environment: -20°C ~ 50°C
 Longevity: 20000h
 Driver: 3AAA Constant Current

Packing

Model	Weight/PC	Qty/CTN	Inner Box Size	Master CTN
DL7850	2kgs	6	63.5*8*64cm	126*17*15cm

DETAILS

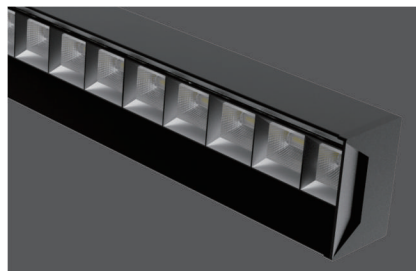

Highly integrated optical lens and reflector. UGR < 16. Precise lighting distributions and comfortable light feelings.